

Stepper Motors

Two phases, 20 steps per revolution

For combination with:

Gearheads: 08/1, 10/1, 12/3, 12/5

Encoder: HE



Drive Electronics: AD VL M, AD VM M, AD CM M

Series AM 1020

	V 3	V 6	V 12	A 0.25	
		Voltage mode		Current mode	
1 Nominal supply voltage U_N	3	6	12	7.4	V DC
2 Phase Resistance at 20°C (68°F)	16	65	250	7.4	Ω
3 Phase inductance (1kHz)	4.5	18	70	2.1	mH
4 Nominal current per phase (both phases ON)	0.175	0.09	0.045	0.25	A
5 Back-EMF amplitude	2.25	4.5	9	1.5	V/k step/s
6 Holding torque ¹⁾ (with nominal current in both phases)	0.227				oz-in
7 Holding torque ¹⁾ (with twice the nominal current)	0.340				oz-in
8 Residual and friction torque	0.035				oz-in
9 Thermal resistance winding-ambient air	73				°C/W
10 Winding temperature tolerated, max.	130 (266)				°C (°F)
11 Ambient working temperature range	-40 to +70 (-40 to +158)				°C (°F)
12 Thermal time constant	90				s
13 Full step angle	18				degree
14 Angular accuracy ²⁾	± 10				% of full step
15 Rotor inertia	$1.27 \cdot 10^{-6}$				oz-in-sec ²
16 Shaft bearings	sintered bronze sleeve (standard)		ball bearings, preloaded (optional)		
17 Shaft load, max.:	1.08		14.4		oz
- radial (3 mm (0.118 in.) from bearing)	1.08		7.2		oz
18 Shaft play, max.:	5.91 · 10 ⁻⁴		4.72 · 10 ⁻⁴		in
- radial (0.720 oz)	5.91 · 10 ⁻⁴		~0		in
- axial (0.720 oz)	5.91 · 10 ⁻³				oz
19 Weight	0.19				oz
20 Isolation test voltage	200				V DC
21 Resonance frequency	140				Hz
22 Electrical time constant	0.28				ms

¹⁾ with bipolar driver

²⁾ 2 phases ON, balanced phase current

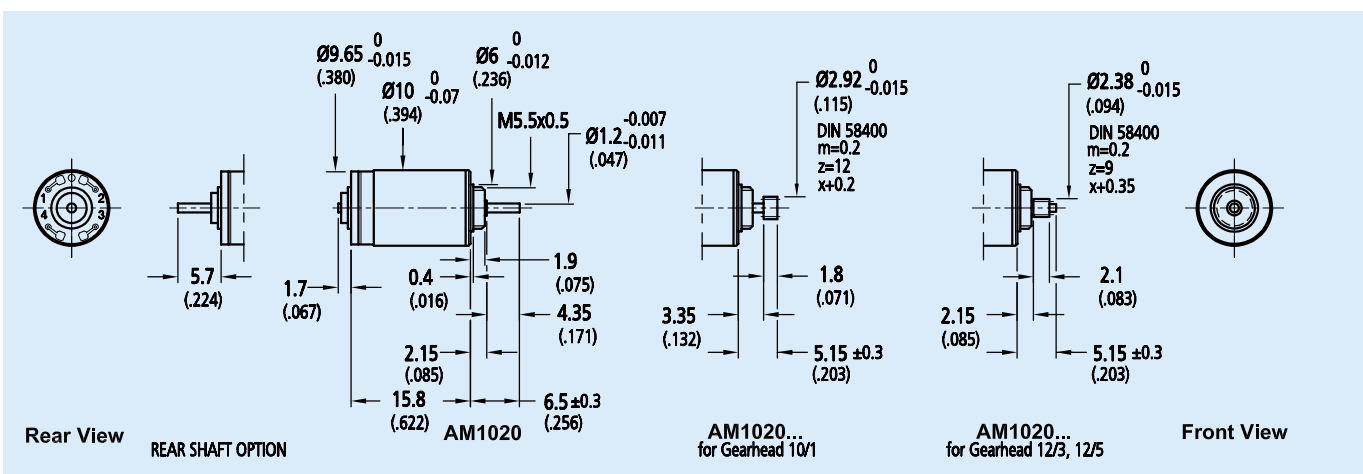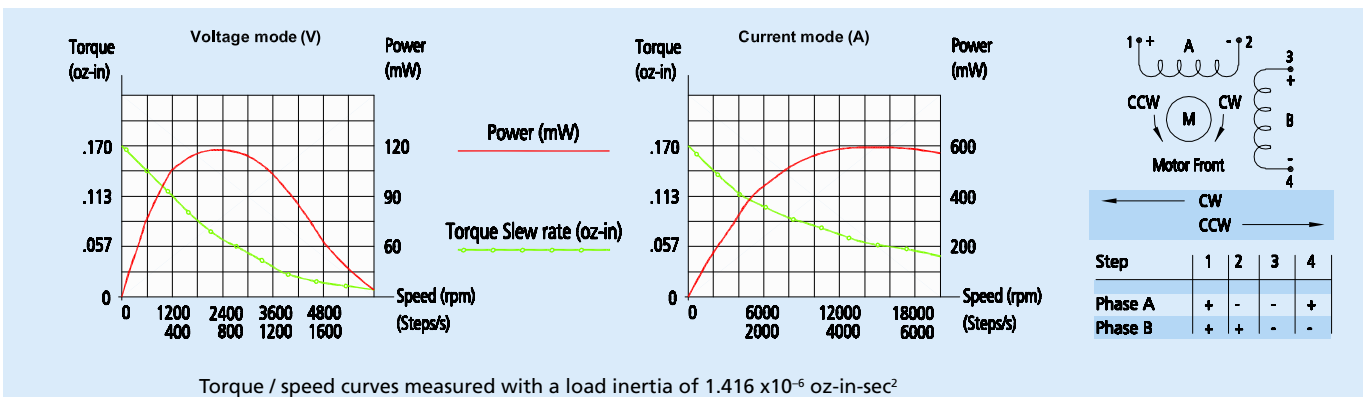

For notes on technical data refer to "Technical Information". Specifications subject to change without notice. MWME0304